

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

AU 200062901

(12) DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITÉ DE COOPÉRATION  
EN MATIÈRE DE BREVETS (PCT)

(19) Organisation Mondiale de la Propriété  
Intellectuelle  
Bureau international



(43) Date de la publication internationale  
25 janvier 2001 (25.01.2001)

PCT

(10) Numéro de publication internationale  
WO 01/05454 A1

(51) Classification internationale des brevets: A61M 5/30

CROSS SITE TECHNOLOGIES (FR/FR); 42, rue de  
Longvieu, F-21300 Chenove (FR).

(21) Numéro de la demande internationale:

PCT/FR00/01851

(22) Date de dépôt international: 30 juin 2000 (30.06.2000)

(25) Langue de dépôt: français

(26) Langue de publication: français

(30) Données relatives à la priorité:  
99/09252 16 juillet 1999 (16.07.1999) FR

(71) Déposants (pour tous les États désignés sauf US): *Crossject* SNPE;  
[FR/FR]; 12, quai Henri IV, F-75181 Paris Cedex 04 (FR).

(72) Inventeurs; et

(75) Inventeurs/Déposants (pour US seulement): ALEXAN-  
DRE, Patrick [FR/FR]; 14, avenue de la Libération,  
F-70100 Gray (FR). BROUQUIERES, Bernard [FR/FR];  
4, rue Sandin, F-83100 Toulon (FR). MIKLER, Claude  
[FR/FR]; 117, avenue du Drapeau, F-21000 Dijon  
(FR). NAVELIER, Alain [FR/FR]; Quartier Figou,  
F-83390-Pierrefeu du Var (FR).


(74) Représentant commun: SNPE; Service Propriété Indus-  
trielle, 12, quai Henri IV, F-75181 Paris Cedex 04 (FR).

[Suite sur la page suivante]



(54) Title: NEEDLELESS SYRINGE COMPRISING AN INJECTOR WITH NESTED ELEMENTS

(54) Titre: SERINGUE SANS AIGUILLE AVEC INJECTEUR A ELEMENTS EMBOITES

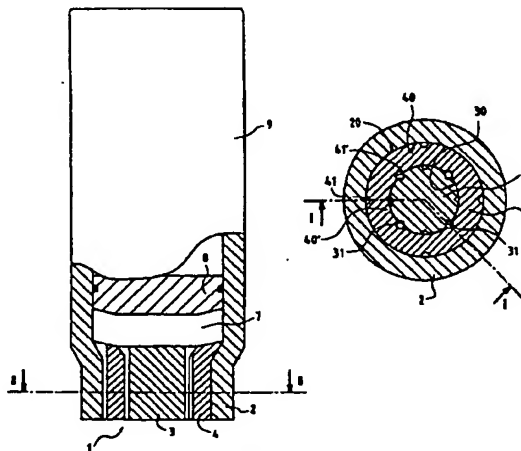

WO 01/05454 A1

(57) Abstract: . The invention concerns the field of needleless syringes for injecting an active principle for therapeutic purposes. More particularly, it concerns a needleless syringe for injecting an active principle (7) initially set between an injector (1, 10) comprising at least an injection nozzle, said injector being contacted with the skin, and a wall (8) mobile under the effect of a propelling system (9) pressurising and expelling the active principle through the injector located at the syringe downstream end (2). In order to produce nozzles in a considerable injector thickness and to control the jet coherence distance, said injector (1, 10) comprises at least two elements (3, 4) whereof the contact surfaces (30, 40, 40') are oriented towards the skin, at least a groove (31, 41, 41') forming an injection nozzle in the assembly of said elements.

(57) Abrégé: La présente invention est dans le domaine des seringues sans aiguille pour l'injection de principe actif liquide à usage thérapeutique. Elle concerne une seringue sans aiguille pour l'injection d'un principe actif (7) initialement placé entre, d'une part un injecteur (1, 10) comportant au moins une buse d'injection,

[Suite sur la page suivante]



(81) États désignés (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), brevet OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Publiée:

— Avec rapport de recherche internationale.

(84) États désignés (*régional*): brevet ARIPO (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), brevet eurasien (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), brevet européen

En ce qui concerne les codes à deux lettres et autres abréviations, se référer aux "Notes explicatives relatives aux codes et abréviations" figurant au début de chaque numéro ordinaire de la Gazette du PCT.

ledit injecteur étant placé au contact de la peau, et d'autre part une paroi déplaçable (8) sous l'effet d'un système propulsif (9) assurant la mise en pression et l'expulsion du principe actif au travers de l'injecteur placé à l'extrémité aval (2) de la seringue. Afin de réaliser des buses dans une grande épaisseur d'injecteur et de contrôler la distance de cohérence du jet le dit injecteur (1, 10) comprend au moins deux éléments (3, 4) dont les surfaces en contact (30, 40, 40) sont dirigées vers la peau, au moins une rainure (31, 41, 41) qui constitue une buse d'injection dans l'assemblage des dits éléments.

NEEDLELESS SYRINGE HAVING AN INJECTOR OF FITTED-  
TOGETHER ELEMENTS

The present invention is in the field of needleless  
5 syringes used for intradermic, subcutaneous and  
intramuscular injections of liquid active principle for  
therapeutic use in human or veterinary medicine.

In this field, to improve the effectiveness of the  
10 injection, use is made of syringes with, at their  
downstream part applied to the skin or very close to  
the skin of the subject, an injector comprising several  
ducts so that the liquid that is to be injected can be  
distributed to several points spread over a relatively  
15 large area. This solution also has the advantage of  
reducing the pain and eliminating any possible  
superficial or subcutaneous damage that might result  
from an excessive amount of liquid injected at a single  
point.

20

To improve the effectiveness of the injection, the  
shape of the jet is also altered: the coherent distance  
of the jet is controlled and a solution is sought that  
is someway between a highly coherent jet, such as used  
25 for jet cutting and which would have very deep  
penetration and would cause dangerous tearing of the

skin, and a jet which nebulizes the liquid and thus the fine droplets do not penetrate the skin.

US patent 3 802 430 describes a needleless syringe in which the liquid that is to be injected is discharged by a piston pushed by gases produced by a pyrotechnic generator; that syringe has five ducts which are parallel to the axis of the syringe and have circular cross sections. US patent 3 788 315 describes a syringe in which the piston discharging the liquid is pushed by the expansion of compressed gases or of a compressed spring. That syringe has six ducts of circular cross sections and the axes of which diverge slightly from the axis of the syringe. In these examples, although the liquid is spread across several points, the ducts remain fairly close together; in addition, the simplicity of the shape of these ducts shows that these ducts are not optimized for controlling the coherent length of the jet which is itself an important factor in the performance of the injector in this particular application.

More generally, the problems posed by producing an injector for a syringe are problems of mechanical

strength, of performance as we have just mentioned, and of cost.

Specifically, the injector, placed at the downstream  
5 part of the syringe, must not deform under the effect  
of the pressure of the liquid at the time of injection:  
the injector has to be relatively thick, and the more  
widely the ducts are spread over a large area, the  
thicker it has to be. The problem will be that of  
10 producing ducts which in general are very fine through  
great thicknesses.

The performance of the injector lies in the possibility  
of controlling the coherent distance of the jets  
15 leaving the ducts or nozzles, for predetermined  
conditions of use (nature of the liquid, injection  
pressure), through ducts of appropriate cross sections.  
The purpose of this appropriate cross section is to  
create a field of turbulence in the flow such that, a  
20 short distance from the exit from the injector, the jet  
remains coherent, that is to say is fine and fast-  
moving enough to pierce and penetrate the skin of the  
subject that is to be treated, and then the jet very  
quickly loses its coherency: it explodes to best  
25 diffuse the active principle under the skin. The

---

problem is that of, in a simple way, producing not only fine ducts over great thicknesses but, above all, ducts with appropriate cross sections.

- 5 Finally, the cost of manufacture becomes a very important factor in the case of mass-produced syringes, particularly for disposable syringes.

The present invention relates to a needleless syringe  
10 for intradermic, subcutaneous or intramuscular injecting of a liquid active principle initially placed between, on the one hand, an injector comprising at least one injection nozzle, said injector being placed in contact with the skin or a very short distance away  
15 from the skin of the subject that is to be treated, and, on the other hand, a wall that can be displaced under the effect of a propulsive system pressurizing and expelling the active principle through the injector placed at the downstream end of the syringe, which is  
20 such that the injector consists of at least two elements the contacting surfaces of which are directed towards the skin, at least one of the contacting surfaces having at least one groove which constitutes an injection nozzle in the assembly of said elements.

---

In this invention, "liquid active principle" is essentially intended to mean a somewhat viscous liquid, or a mixture of liquids, or a gel. The active principle may be a solid placed in solution in an appropriate solvent for injection. The active principle may be a solid in pulverulent form placed in suspension, of greater or lesser concentration, in an appropriate liquid. The particle size of the solid active principle and the shape of the duct need to be matched to avoid the ducts becoming blocked.

One constituent element of the injector comprises a face which lies on the active principle side: this will be termed the upstream face, and a face located on the skin side: this will be termed the downstream face, and the lateral surface, all or some of which is in contact with all or some of the lateral surface of at least one other element. Over at least a portion of the lateral surface, at least one groove runs from the upstream face to the downstream face.

In the assembly of the constituent elements a groove may face the lateral surface of an adjacent element; it may also face another groove running along the lateral face of the other adjacent element; the grooves placed



facing each other may have identical or different cross sections.

In the case of the injector of the syringe in a first configuration, the contacting surfaces of two adjacent elements, which contacting surfaces are wholly or partly lateral surfaces of said elements, are surfaces of revolution.

10 In a second configuration of the injector, the contacting surfaces of two adjacent elements, which contacting surfaces are wholly or partly lateral surfaces of said elements, are flat surfaces.

15 The transverse dimensions of a groove are very small with respect to the length of the groove. It may be said to a first approximation that the groove is positioned around the curve running along a portion of the lateral surface of a constituent element of the  
20 injector.

In a first embodiment, this curve running along the lateral face is roughly straight: the groove will be said to be straight. This is, for example, the case of

---

a longitudinal groove made on a surface which is itself flat, or cylindrical or conical.

In a second embodiment, this curve running along the lateral face is not straight or is an oblique curve not contained in any plane, and the groove will be said to be helical. This is, for example, the case of a helical groove produced on a cylindrical or conical surface.

10 In a third embodiment, this groove is formed by the convergence of at least two groove portions beginning from the upstream face of the element and ending in a single groove portion towards the downstream face of the element. The various groove portions are straight  
15 or helical.

Advantageously, the groove has a cross section that is roughly constant when following the groove from the upstream face to the downstream face of the element.  
20 Its cross section is preferably of simple geometric shape, for example a V-shaped, U-shaped or semicircular groove. These shapes have a plane of symmetry which passes through an axis of symmetry of the element.

---

As a preference, the groove has an evolving cross section. When the groove is followed from the upstream face to the downstream face, its cross section varies or evolves, increasing or decreasing, uniformly or abruptly, so that the nozzle has a succession of tubular parts and of cavities, an appropriate arrangement of these various parts making it possible to master and control the jet coherent distance according to predetermined conditions of use: viscosity of the liquid that is to be injected, injection pressure, in particular.

Such an evolving cross section is, for example, achieved simply from a groove of constant cross section, like the one previously described, on which is superposed at least one recess which locally widens and deepens the groove. In the assembly of the elements of the injector, said recesses will create cavities along the injection nozzle which will be of evolving cross section, this arrangement making it possible to control the jet coherent distance.

The convergence of at least two grooves into a single groove may also achieve the evolving cross section as it is to be understood here.

Finally, the groove may be a succession of recesses very close together which constitute the groove of evolving cross section.

5

In a first embodiment of the needleless syringe, the injector includes a support comprising at least one housing into which an element which constitutes a one-piece core is fitted. Said core and support comprising  
10 grooves to produce at least one injection nozzle.

In the second embodiment of the needleless syringe, the injector comprises at least one core consisting of at least two elements or quarters assembled via their flat  
15 faces to form at least one nozzle of evolving cross section, the elements or quarters of the various cores being fitted into housings of a support.

For these two embodiments, a fitting-together is  
20 preferably a forced press fit which also ensures sealing at the contacting surfaces.

The one-piece core or the core made up of several quarters either exhibit symmetry of revolution; the  
25 core has the shape of a cylinder or of a cone frustum,

or symmetry of repetition of order  $n$ : the core has the shape of a prism or of a pyramid frustum. Obviously, the housing that accommodates the core has the same shape, it has a mating shape so that the two can be  
5 fitted together.

In a third embodiment of the needleless syringe, the injector comprises at least one core consisting of at least two quarters assembled by their flat faces to  
10 form at least one nozzle with an evolving cross section, the quarters of the various cores being held together by overmolding.

Nested assemblies, in which a subassembly comprising a  
15 support of overmolding equipped with their cores also forms part of the invention. The preferred nested assembly is the one that consists of the fitting-together of a core into a support having one single housing, this fitted-together assembly acting as a core  
20 for another support with one single housing. One particularly simple embodiment consists in fitting a core directly into the downstream end of the syringe formed for this purpose.

Advantageously, in the case of elements of truncated shape such as cone frustums, pyramid frustums or quarters of such elements, construction and assembly will be performed in such a way that the downstream  
5 face is that of the smallest cross section: through this assembly, the pressure of the liquid will have a tendency to fit the elements together rather than driving them out of their housings.

10 The present invention also relates to an injector such that said injector consists of at least two elements the contacting surfaces of which are directed towards the skin, at least one of the contacting surfaces comprising at least one groove which constitutes an  
15 injection nozzle in the assembly of said elements.

A syringe according to the invention solves the problems posed. In terms of the strength of the injector, the increase in the thickness presents no  
20 difficulties with regard to producing fine ducts with evolving or non-evolving cross sections over great thicknesses.

In terms of the performance of the injector, the  
25 invention makes it possible in a simple way, in order

---

so that it can be adapted to predetermined conditions of use, to control the coherence distance of the jets leaving the nozzles.

5 In terms of the cost aspect, the injector has relatively simple shapes which are easy to produce, by directly molding the elements of the injector or by machining grooves and recesses into blanks produced elsewhere. All of these manufacturing and assembly  
10 operations lend themselves to a high degree of automation.

The syringe according to the invention additionally has an undeniable advantage from the point of view of  
15 safety in the event of abnormal use. For example, if the syringe is directed towards the face and triggered accidentally, the jets will have no effect other than to shower said face with active principle, without any mechanical piercing effect, as long as the syringe is  
20 not in contact with (or very close to) the face. This advantage is associated with the mastery of the jet coherence distance.

The present invention will be described in greater  
25 detail with the aid of the following figures.

Figure 1 depicts, in longitudinal part section, a syringe according to the invention.

5 Figure 2 depicts, in cross section, the injector of said syringe.

Figures 3 and 4 depict, in perspective, types of cores that can be used in the injector of the syringe  
10 previously depicted.

Figure 5 depicts, viewed in perspective, two elements of a core according to another embodiment of the invention.

15

Figure 6 depicts, in longitudinal section, a syringe injector obtained by assembling elements of the type of those depicted in figure 5.

20 Figure 1 schematically depicts a needleless syringe for injecting liquid active principle. Such a syringe is generally cylindrical and has a reservoir containing the active principle 7. This reservoir is closed at one end, which we have called the downstream end 2, by an  
25 injector 1 comprising at least one duct or one



injection nozzle. This injector generally rests against the skin of the subject that is to be treated, or is held a very short distance away from the skin, the skin not being depicted in this drawing. This injector is 5 the end of the reservoir or is an attached piece 3, fixed to this end of the reservoir by appropriate means. The other end of the reservoir is closed by a displaceable wall, for example a piston 8 comprising means for providing sealing, such as an O-ring. 10 Finally, the syringe comprises a propulsive system 9 with a triggering device for displacing the piston and injecting the liquid. Among the propulsive systems that can be used and without going into detail thereof, we may mention a pyrotechnic gas generator as described in 15 US patent 3 802 430 already mentioned, we also mention the expansion of a compressed gas or the compressed spring, as described in US patent 3 788 315. Obviously, the syringes according to the invention may be fitted with any one of these types of propulsion system for 20 displacing the piston.

The injector 1 (see also Fig. 2) is forcibly press fitted into the end 2 of the syringe. This injector comprises an essentially cylindrical support 4 with an 25 exterior lateral face 40 resting against the interior

lateral face 20 of the end of the syringe and an interior lateral face 40' against which the exterior lateral face 30 of a core 3, in this example a one-piece core, comes into contact. The support 4 and the  
5 core 3 each have, on the upstream side, a shoulder which serves to immobilize and wedge these three elements 3 and 4 in the assembly; the shoulder is, in this example, frustoconical. The grooves on the exterior lateral walls continue into the frustoconical  
10 shoulder.

Figure 2 depicts, in cross section, the downstream end 2 of the previously described syringe. The support 4 is fitted into the end 2 of the syringe, the contacting  
15 faces being, respectively, the lateral faces 40 and 20'. Fitted inside the support 4 is a core 3, the contacting faces being, respectively, the lateral faces 40' and 30. The exterior lateral face 40 of the support 4 has four grooves, such as the groove 41, and these  
20 are uniformly distributed and have roughly the shape of a semicircle, said grooves facing the lateral surface 20 of the downstream end 2 of the syringe. The interior lateral face 40' of the support 4 also comprises four grooves, such as the groove 41', similar to the  
25 previous ones, also uniformly distributed but offset by

45° with respect to the outer grooves. Finally, the lateral face 30 of the core 3 has eight grooves, such as the groove 31, these being uniformly distributed and having a V-shaped cross section. Of these grooves, every second one faces a groove such as the groove 41', the other grooves facing the interior lateral wall 40' of the support.

The grooves on the exterior lateral walls, grooves such as the grooves 31 or 41, continuing to the frustoconical shoulder of the core 3 and of the support 4. The grooves on an interior lateral face such as the groove 41' are in the continuation of the opening in the shoulder of the groove such as 31 placed facing it.

15

The transverse dimensions of the grooves are such that they correspond to circular orifices with equivalent diameters of 0.05 mm to 0.5 mm. The height of an element injector is between about 3 mm and about 10 mm. Finally, the orifices of the grooves are distributed around concentric circles, the diameters of which are between 3 mm and 30 mm.

20

Figure 3 depicts a core 33 viewed in perspective. This core is mounted on a support of the type depicted in the previous figures.

5 The core 33 is essentially circular and cylindrical, and on the upstream side has a frustoconical shoulder, the upstream face 331 of which is visible. The lateral surface of the core has eight grooves 53 distributed uniformly, these are longitudinal and of semicircular  
10 cross section; these grooves continue into the shoulder. On each groove there are two conical recesses 63 which locally widen and deepen the groove. When this core is fitted into a housing of a support, these grooves and recesses will produce a nozzle of evolving  
15 cross section comprising, in this example, two cavities which will generate turbulence in the jet and thus allow the jet coherence distance to be controlled.

In this example, the core, over a circular part, has a  
20 diameter of 8 mm and its overall height (including shoulder) is 5.8 mm; the grooves are of semicylindrical shape, the radius being 0.1 mm, the cones having the vertex angle of  $90^\circ$  and a circular base 1 mm in diameter.

Figure 4 depicts another core 34 viewed in perspective.

This core, the geometry of which is of revolution, is the combination of the frustoconical part at the upstream end and of a cylindrical part at the downstream end, this combination of shapes ensuring that the core is self-immobilized in its housing. The lateral surface 340 of the core has eight groups of uniformly distributed grooves. The cross section of the grooves is U-shaped. On the frustoconical part of the lateral surface 340, starting from the upstream face 341, two identical groove portions converge to join together as a single groove, with the same cross section on the cylindrical part of the lateral surface so as to open onto the downstream face. In this example, the shear at the confluence of two flows will generate the turbulence that controls the jet coherence distance.

Figure 5 depicts, in perspective, a core consisting of several parts or quarters, in this example two parts essentially in the shape of two half-cylinders depicted with a marked separation to make the diagram more legible. These two half-cylinders will be back to back via their flat faces 50 and 60 (the latter

is hidden in the case of the element 6). In this example, each flat face has, at its middle, a groove of evolving cross section. Given that its appearance differs slightly from what has already been described, we shall also call it a recess, but said recess is really a groove with evolving cross section according to the invention.

Figure 6 depicts, in cross section, an injector consisting of two cores comprising two parts 5, 6 assembled in an overmolding 45; the parts 5, 6 have, at their two ends, a portion of smaller diameter which forms shoulders for centering the elements in the overmolding. In the assembly of the quarters such as 5 and 6, the recesses facing each other form a duct with symmetry of revolution and evolving cross section comprising, in this example, from the upstream face to the downstream face, a cone frustum meeting an oblong cavity followed by a circular cylindrical portion connecting to a cavity formed by two unequal cone frustums joined by their largest bases.

In general, the thickness of an element of the injector, this being the distance from the upstream face to the downstream face, is between about 3 mm and

about 10 mm. The dimensions of the cross sections of the grooves or the recesses evolve and are such that the area corresponds to that of a circular duct of a diameter varying between about 50  $\mu\text{m}$  and 1000  $\mu\text{m}$ .

5

The materials for producing the syringe and the various parts of the nozzle will be chosen from materials which are compatible and approved for medical use; without claiming to be exhaustive, we quote by way of example

10 plastics materials such as polycarbonate, polytetrafluoroethylenes; metals, stainless steel, or glass for medical use type I or II.

Where the terms "comprise", "comprises", "comprised" or "comprising" are used in this specification, they are to be interpreted as specifying the presence of the stated features, integers, steps or components referred to, but not to preclude the presence or addition of one or more other feature, integer, step, component or group thereof.


The claims defining the invention are as follows:

1. A needleless syringe for injecting an active principle initially placed between, on the one hand, an injector including at least one injection nozzle, said injector  
5 being placed at the downstream end of the syringe, and, on the other hand, a wall that can be displaced under the effect of a propulsive system pressurizing and expelling the active principle through the injector, wherein the injector consists of the assembly of at least two elements; each element having a downstream face, an upstream face and a lateral surface joining them together, the contacting surfaces of said elements in the assembly being  
10 wholly or partly lateral surfaces of said elements; at least one of the contacting surfaces having at least one groove which constitutes an injection nozzle in the assembly of said elements.

2. The needleless syringe as claimed in claim 1, wherein the contacting  
15 surfaces are surfaces of revolution.

3. The needleless syringe as claimed in claim 1, wherein the contacting surfaces are flat surfaces.


20 4. The needleless syringe as claimed in any one of the preceding claims, wherein the groove is straight.



5. The needleless syringe as claimed in claim 1 or claim 2, wherein the groove is helical.

25

6. The needleless syringe as claimed in any one of claims 1 to 3, wherein a groove is formed by the convergence of at least two grooves beginning from the upstream face and ending in a single groove towards the downstream face of the element.



30 7. The needleless syringe as claimed in any one of claims 4 to 6, wherein the groove has a constant cross section.

8. The needleless syringe as claimed in any one of claims 4 to 6, wherein the groove has an evolving cross section.



9. The needleless syringe as claimed in any of claims 1 to 3 or 8, wherein the injector includes a support including a housing into which a one-piece core is fitted.

5 10. The needleless syringe as claimed in any one of claims 1, 3 or 8, wherein the injector includes at least one core consisting of at least two quarters assembled via their flat faces to form at least one core with a nozzle of evolving cross section, the quarters of the various cores being fitted into housings of a support.

10 11. The needleless syringe as claimed in any one of claims 1 to 3 or 8, wherein the injector includes at least one core consisting of at least two quarters assembled by their flat faces to form at least one core with a nozzle with an evolving cross section, the quarters of the various cores being held together by overmoulding.

15 12. An injector for a needleless syringe, wherein said injector consists of at least two elements; each element having a downstream face parallel to the downstream face of the injector, an upstream face and a lateral surface joining them together, the contacting surfaces of said elements in the assembly being wholly or partly lateral surfaces of said elements; at least one of the contacting surfaces including at least one groove which  
20 constitutes an injection nozzle in the assembly of said elements.

25 13. A needleless syringe, substantially as hereinbefore described with reference to the accompanying drawings.


14. An injector for a needleless syringe, substantially as hereinbefore described with reference to the accompanying drawings.

Dated this 5<sup>th</sup> day of March, 2003

30 **CROSSJECT**

By Their Patent Attorneys

**CALLINAN LAWRIE**

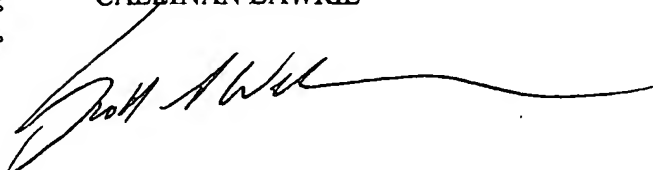

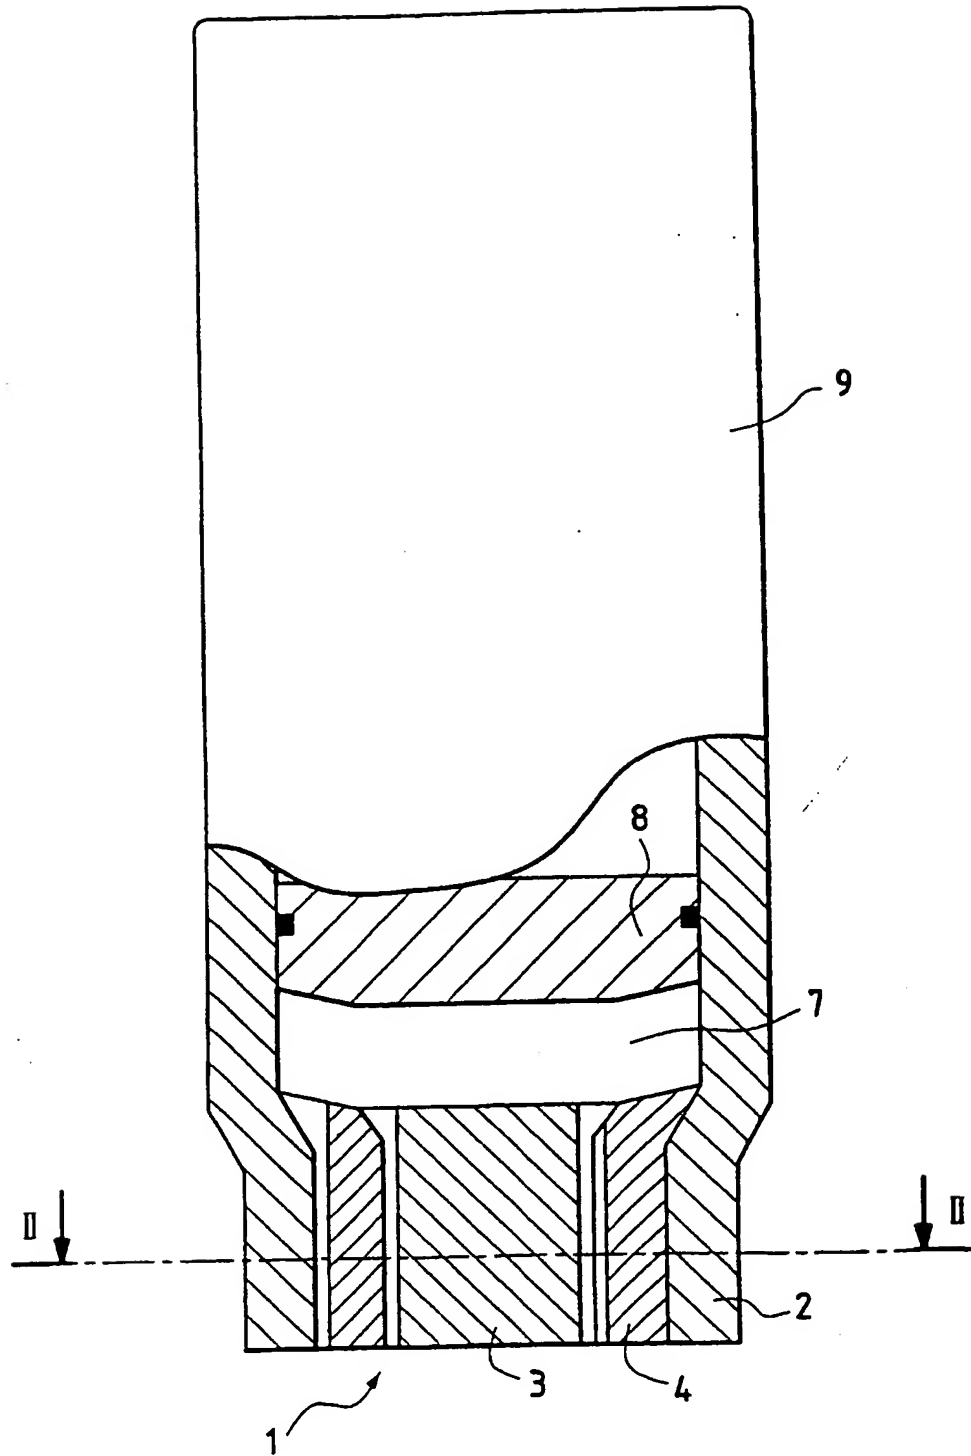


FIG.1

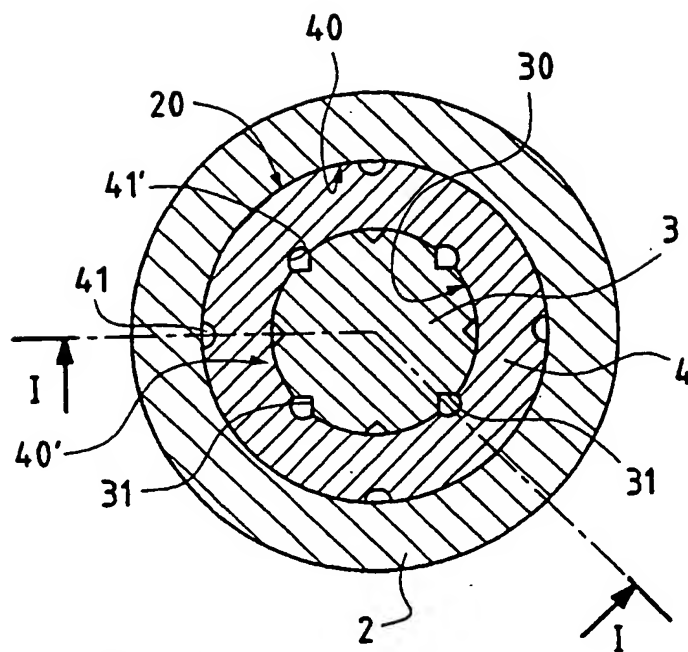


FIG. 2

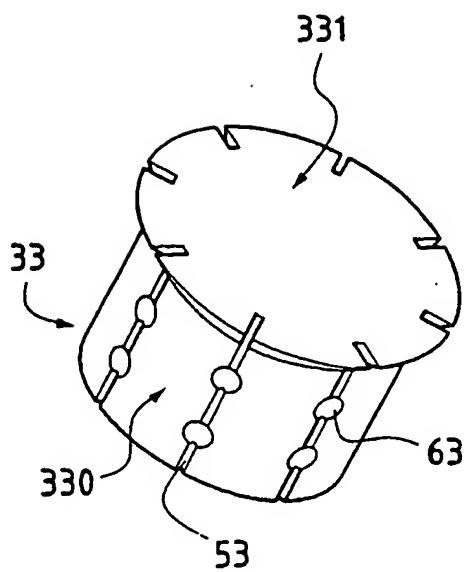


FIG. 3

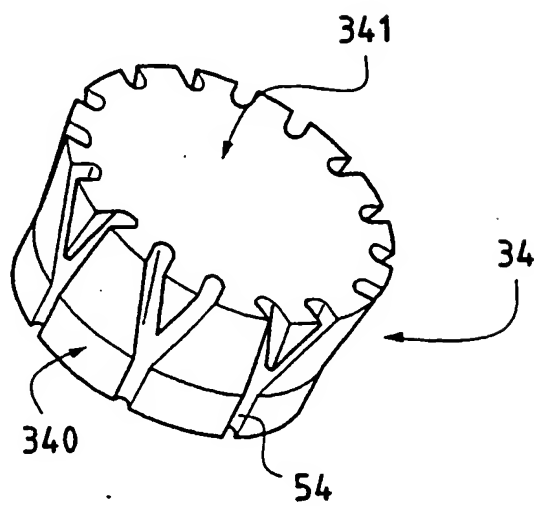


FIG. 4

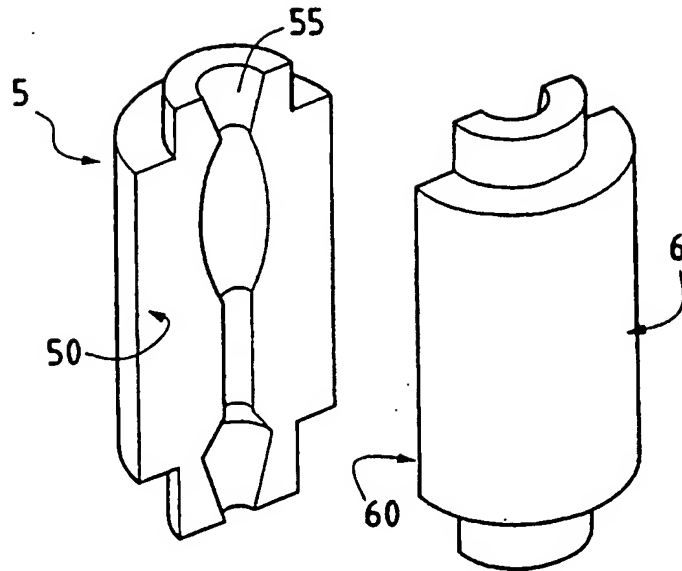


FIG. 5

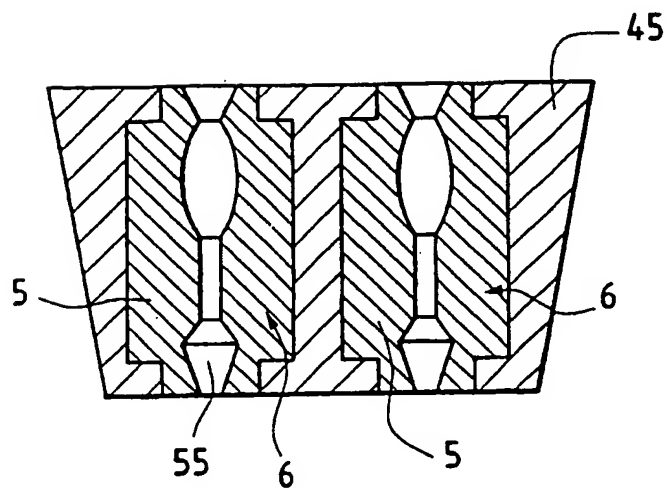


FIG. 6